

Conserv v40 LED Panel Light

40W - 295x1195x12.5mm | M30120W40-NW

The ultimate LED Panel light with class-leading energy efficiency

The Conserv v40 is a highly efficient eco friendly LED luminaire, designed to reduce power consumption with manually adjustable lighting output. With its low glare and powerful light diffusion, the Conserv v40 delivers the most effective lighting saving solution to suit any space.

True energy saving dimming option

200-230V Variable Current.
Dimmable LCM-40 MW Driver.

Bright 4400 lumens output

Uniform, diffused light with minimum light loss.
LED Panels with excellent light output.
Wide 120 degree beam spread.

Various colour temps available

Ideal light colour for most applications.
Bright white without blue or yellow tints.

Economical & reliable operation

Excellent reliability in the marketplace.
Saves up to 75% in power consumption.
Significant savings in replacement fluoro tubes.
50,000+ hour service life. 5 year warranty.
Power Factor(PF) > 0.95 @ 40W.

Clean, low maintenance fitting





Clean white diffuser. No glass tubes. No mercury.
Clean, simple lines - unobtrusive modern shape.
Sturdy polycarbonate and aluminium construction.
Glass-free, easily cleaned and maintenance-free.

Easy to install

Simply drop into existing T-Bar structures.
If using dimming option, set wattage and plug in.



Key features

- > Eco-friendly, energy saving and high luminous efficacy
- > Aluminium frame with good heat conduction & steel plate back
- > Installation way: recessed, surface mounted
- > Working Temperature: -20degree~40degree
- > CE Driver
- > Instant start, no flickering, no humming
- > Warranty: 5 years  
- > Certificate: CE, RoHS  


Technical parameters

Input Voltage	200-240VAC,50/60Hz
Power Consumption	40W±10%(Dimmable)
Luminous Output	4400Lm±10%(4000K)
Colour Rendering Index (CRI)	Ra>80
Color Temperature	3000K/4000K/6500K(±200K)
Beam Angle	120°
Composition - diffuser/frame	PMMA - PS diffuser/aluminium
Service Life	50,000+ hours
Operating Temperature	-20°C~°40C
Storage Temperature	-20°C~°50C
Flex & Plug	1.2m flex & plug supplied as standard
IP Rating	IP20
Installation Options	Ceiling Mounted / Drop-in
Weight	3.25kg
Product Code	M30120W40-NW 295x1195x12.5mm


Conserv v40 LED Panel Light

40W - 295x1195x12.5mm | M30120W40-NW

Light Distribution Curve/cd:

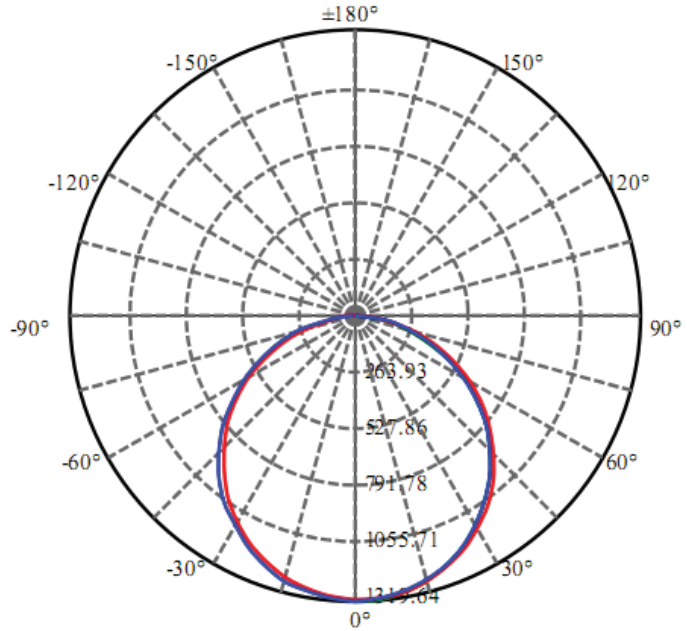

Lux Distance Curve:

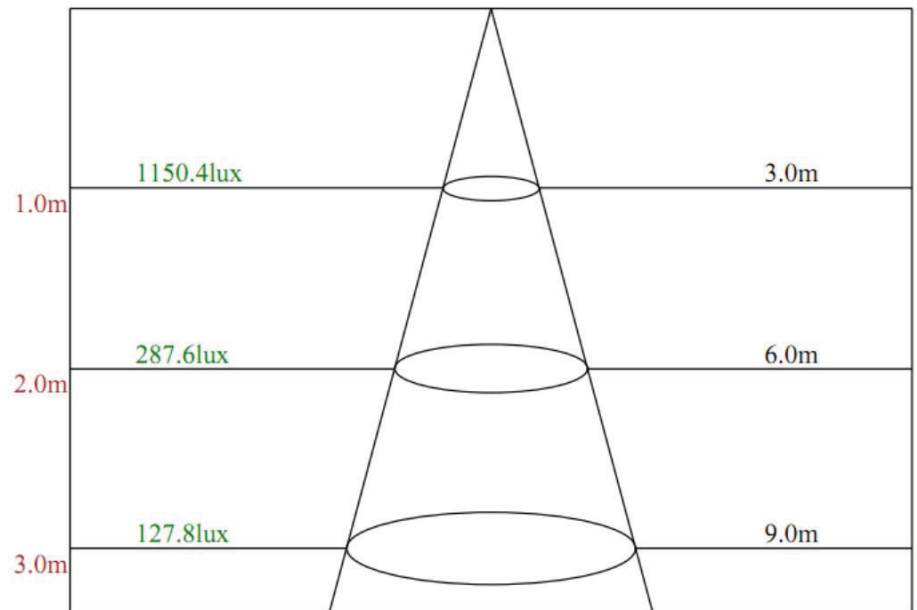

Dimension Data:

